



ريتايج للتجارة العامة
Reetaj General Trading

DUCT
COOL



Welcome from Manager Director:

The warmest regards are sent to you from **Mr. TAHER SAEED** the managing director and employee at Reetaj General Trading L.L.C. Company.

We take great pleasure dedicating this profile to you esteemed corporation and to introduce our company and service to you kind self, hoping for future cooperation. Our services are based on strict standards to guarantee product quality that accepts no compromises.

With its state-of-the art setup and modernized machines, Reetaj is building a reputation for reliability and integrity, two qualities that embody RGT's commitment to excellence. We are constantly striving to build relationships with our clients.

We look forward to commencing a mutually beneficial relationship and welcome the opportunity to discuss how we can contribute to your organization's success.



Our experience

Reetaj General Trading LLC company has been established on Oct 2010 in Sharjah-UAE by a professional team has a combined experience since 2007 in HVAC system of service in UAE & GCC market.



The key to our success:

We believe that through efficient, timely and economically viable executing and capability, we will be able to provide stellar service to our customer.



Our Mission:


To gain our customer confidence by providing best product quality, service and competitive price.



Our vision

To be globally the best Supplier and to our Customer the First Choice.

PIR DUCT & ACCESSORIES

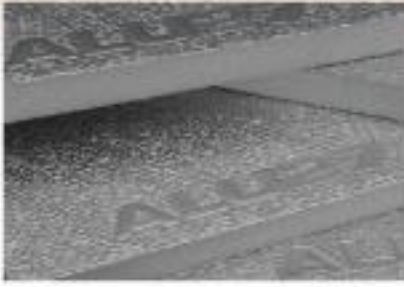

Pre Insulated panel 20 & 30mm



Pre Insulated Phenolic panel 20mm



PIR Fabrication Images

Aluminum Accessories



Aluminum Invisible
20mm & 30mm



Aluminum Chair Profile
20mm & 30mm



Aluminum F Profile
20mm & 30mm



Aluminum U Profile
20mm & 30mm



Aluminum
Reinforcement Bar



Aluminum Disc



GI Disc Screw



GI PIR Corner
20mm & 30mm


PVC Accessories



PVC Invisible Flange 20mm



PVC H Bayonet



PVC corner 2 Way Shape



PVC Corner 1 Way Shape

Pre Insulated Tools



Pre Insulated Bending Machine



Pre Insulated Cutting Tools (4 pcs/Set)



Silicon Gun



Clamping Ruler 1200mm & 4000mm

Duct Accessories



Duct mate Flange
Size: 20mm to 40mm
Standard length: 5 Meter



Duct Mate Corner
Size: 20mm to 40mm



GI G Clamp
Size: 40mm



GI C Cleat
Size 20mm & 30mm



GI U Cleat
Standard Length
1.2 & 2.4 Meter



GI S & Cleat
Standard Length 1.2 & 2.4 Meter



GI L Angle
Size: 20mm & 30mm



GI Threaded Rod
Size: 6mm to 10mm



GI Bolt, Nut & Washer
Size: 6mm to 10mm



GI Fix Bolt
Size 6mm to 10mm



GI Unifix
Size 6mm to 10mm

PIPE Support



Split Clamp Rubber Clamps
Size: 1/2" to 8"



Clevis Clamps
Size: 1/2" to 8"



Sprinkler Clamps
Size: 1/2" to 8"



Plain Split Clamps
Size: 1/2" to 8"

Duct Cool Tape



Aluminum Foil Tape

| | | | |
|-----------|------------|------------|------------|
| WIDTH | 2" | 3" | 4" |
| LENGTH | 20&25 YARD | 20&25 YARD | 20&25 YARD |
| ROLLS/CTN | 24 | 16 | 12 |



Foil Scrim Kraft Tape (FSK Tape)

| | | | |
|-----------|------------|------------|------------|
| WIDTH | 2" | 3" | 4" |
| LENGTH | 20&25 YARD | 20&25 YARD | 20&25 YARD |
| ROLLS/CTN | 24 | 16 | 12 |



Aluglass Tape

| | | | |
|-----------|------------|------------|------------|
| WIDTH | 2" | 3" | 4" |
| LENGTH | 20&25 YARD | 20&25 YARD | 20&25 YARD |
| ROLLS/CTN | 24 | 16 | 12 |



Duct Cloth Tape

| | | | |
|-----------|------------|------------|------------|
| WIDTH | 2" | 3" | 4" |
| LENGTH | 20&25 YARD | 20&25 YARD | 20&25 YARD |
| ROLLS/CTN | 24 | 16 | 12 |



Foam Tape

| | | | |
|-----------|-----------|-----------|-----------|
| WIDTH | 1" | 2" | 3" |
| LENGTH | 7.5 Meter | 7.5 Meter | 7.5 Meter |
| ROLLS/CTN | 48 | 24 | 16 |



PVC Pipe Wrapping Tape

| | | |
|-------|-----------|-------------|
| WIDTH | ROLLS/CTN | COLOR |
| 2" | 60 | BLACK/WHITE |

Adhesive and Sealant



Duct Cool 30-36 Canvas Coat
Packing:- 5 Gallon



Duct Cool 81-10
Synthetic Bond Adhesive
Packing:- 15 Liter



Duct Cool R 242
Polychloprene Based Adhesive
Packing:- 1 Gallon



Duct Cool PIR Adhesive
Packing:- 15 Liter



Duct Cool 301 Acrylic Duct Sealant
Packing:- 450 grams [24 pcs/ Box]
Color:- Gray / White

RUBBER INSUALTION

NBR insulation material for refrigeration, ventilation and air conditioning applications, which it says has very good technical properties. NBR complies with most of the British Standards (BS) and American Standards (ASTM), which are required for pipe insulation from nitrile butadiene rubber (NBR).

NBR is a highly flexible, closed-cell insulation material, which provides installations with reliable protection against condensation and energy losses. Technical properties – high resistance to water vapour diffusion (μ -value), low thermal conductivity (λ -value) – it also increases the energy efficiency of the installation in comparison to other elastomeric insulation materials and economical energy-saving solution.

| Product Image | Product Name | Range | Size |
|---|--|---|---|
|  | Elastomeric NBR Pipe Insulation | Range ID: 6mm to 89mm Thickness: 9mm to 25mm | Standard Length 1.8 & 2 Meter Length |
|  | Elastomeric NBR Pre-Slit Pipe Insulation | Range ID: 6mm to 89mm Thickness: 9mm to 25mm | Standard Length 1.8 & 2 Meter Length |
|  | Elastomeric NBR Aluminum Claded Pipe Insulation | Range ID: 6mm to 89mm Thickness: 9mm to 25mm | Standard Length 1.8 & 2 Meter Length |
|  | Elastomeric NBR Plain Rubber Insulation Sheet Roll | Range Thickness: 6mm to 50mm | Standard Width 1 Meter |
|  | Elastomeric NBR Aluminum Claded Rubber Insulation Sheet Roll | Range Thickness : 6mm to 50mm | Standard Width 1 Meter |
|  | Elastomeric NBR Self Adhesive Rubber Insulation Sheet Roll | Range Thickness : 6mm to 50mm | Standard Width 1 Meter |
|  | Elastomeric NBR Plain Rubber Insulation Sheet | Range Thickness : 6mm to 50mm | Standard Size 1 x 1 Meter |

Fibre Glass Insulation

Fibre Glass Insulation Sheet Roll



External insulation of rectangular and circular air ducting and air handling equipment.

is in the form of flexible rolls.

Duct Insulation is available un-faced or with a glass reinforced aluminium foil/Kraft laminate facing (FSK) which combines a pleasing appearance with excellent vapour resistance.

WORKING TEMPERATURE: Fibre 230 °C; Foil Face 100 °C.

COMBUSTIBILITY: Base fibers are non combustible when tested in accordance with BS 476 (part 4), ASTM E1 36.

Fibre Glass Board Insulation



Aluglass Duct System is fabricated from the rigid board composed of resin bonded fine pure spun glass fibres faced with a foil glass cloth laminate (ALUGLASS) water vapour barrier on the outer face, and a reinforced Foil Kraft laminate (FSK) or Foil Kraft laminate (FK) on the interface to provide a smooth air flow and easy cleaning. Specialty fire retardant plastic profiles are used for joining various sections of the duct system in order to ensure no thermal bridge, no air leakage and to provide additional mechanical strength to Aluglass Duct System.

Fibre Glass Pipe Insulation



Performed sections of glass fibres bonded with a heat resistant resin, free from shot and coarse fibre, light, damage resistant, easy to handle, cut and fit. The sections are split along their lengths to provide a hinge for ease of fitting. Thermal insulation of steel, copper or plastic pipes operating in temperature up to 230 °C (450 °F) in case of K450 and up to 454 °C (850 °F) in case of K850. Rigid Pipe Covering can be supplied plain or with Glass Reinforced Aluminium Foil/Kraft Paper laminate (FSK), white ASJ, Canvas.

Acoustic Insulation



Clean liner is a highly efficient acoustic material, produced from strong resilient glass fibres firmly bounded together with a thermosetting resin.

Clean liner is used to line air conditioning ducts, wall, and/or ceiling of acoustically sensitive areas to provide efficient sound insulation for any variety of structure, and/or sensitive facilities as home theatres or studios, curtain walls.

Polyolefin Foam Insulation



Polyolefin Foam Insulation
 Sizes Available 13mm, 19mm, 25mm & 50mm Thickness



Polyolefin Pipe Insulation
 Available in various Thickness & Diameter



Polyolefin Foam Roll

Anti vibration Products



Anti vibration mounts
 Load Rating Range: 25kg & 50 kg



Anti Vibration Hanger
 Load Rating Range: 50 Kg & 75 Kg



Spring Mounts
 Load Rating Range: 50Kg to 1200kg



Spring Hanger
 Load Rating Range: 20kg to 300kg



Cork Sandwich Pad
 Size: 18"x18"x7/8"Thickness
 6" x 6" x 7/8"Thickness



Metal Sandwich Pad
 Size: 6" x 6" x 1/4"Thickness
 4" x 4" x 1/4"Thickness



Waffle Rubber Pads
 Size: 18" x 18" x 1/4"Thickness



Ribbed Rubber pads
 Size: 18" x 18" x 3/8"Thickness

Copper Coils, Pipes & Fitting's



Copper Coil



Copper Pipe



Copper Fitting



Magik Brand 30-36

MAGIK 30 36 is a UL certified, zero VOC, water based, fire retardant coating for Duct Insulation. It is washable, tough, and abrasion resistant. It acts as a lagging & lap adhesive for canvas and glass reinforcing cloth. Due to its excellent brushing characteristic it provides excellent brushing characteristics.



Magik 30-36 AF

MAGIK 30 36 AF is an UL listed premiphere. It is washable, tough, and abrasion resistant. It acts as lagging & lap adhesive for canvas and glass reinforcing cloth. Due to its excellent brushing characteristic it provides excellent brushing characteristics



Magik 60-95

MAGIK 60-95 is a commercial quality water based; fire retardant vapor barrier coating specially produced for all types of external and internal thermal insulation duct systems. It is specially formulated for enhanced vapor barrier protection and for heavy duty commercial or industrial purposes.



Magik VB-95

MAGIK VB-95 is a commercial quality water based; fire retardant vapor barrier coating specially produced for all types of external and internal thermal insulation duct systems. It is specially formulated for enhanced vapor barrier protection and as well as antifungal proection



Magik 81-10

MAGIK 81-10 is a UL listed quality, single component, synthetic rubber based adhesive with special additives and tackyfier. It is specially formulated for porous and non-porous surfaces in humid and hot climatic conditions. It has excellent water and alkali resistance and is inflammable.

Air Outlet

Grills and Diffuser



Square Diffuser



Round Diffuser



Disc Valve



Ball Jet Diffuser



Exhaust Air Louver



Grille & Registers



Linear Bar Grille & Registers



Linear Slot Diffuser



Non Return Damper



Volume Control Damper



Round Volume Control Damper



Back Draft Damper



Motorized Volume Control Damper



Fire Damper



Sound Attenuator



Variable Air Volume



Stand Trap Louver



Motorized Round Volume Control Damper

Insulated Flexible Duct

Flexible Duct Insulated is a very strong fully flexible, compressible light weight Duct which is used in Air Conditioning and Ventilation Systems Flexible Ducts are rated to conform British and Australian

Fire Standards. Comply with UL 181 part 14, Certified to BS 476 parts 5, 6 & 7

Highly resistant to corrosion and micro organisms, Zero Ozone Depleting Potential (ODP)

Application: HVAC Systems including Hospitals, Hotels, Commercial, office, Industrial and Residential Buildings

Standard Length: 25'ft – Per Box

Sizes Available Diameter: 4" to 18"



UN Insulated Flexible Duct

Un Insulated Flexible Duct is a multiply Aluminum Polyester Laminated ducting with an en-capsulated high tensile steel wire helix, Flexible Duct is a range of fully flexible UN insulated aluminum/polyester laminated ducting, which has been specially designed for the HVAC market

Application: HVAC Systems including Hospitals, Hotels, Commercial, office, Industrial and Residential Buildings

Standard Length: 25'ft – Per Box

Sizes Available Diameter: 4" to 18"



Aluminum Rigid Duct

Semi-Rigid Aluminum flexible ducting manufactured from pure aluminum strips, spirally wound, to produce a double overlapped joint to prevent uncoiling in use Fire resistant.

Standard Length: 3 meter – Per Box (In Compressed 900mm)

Sizes Available Diameter: 4" to 12"



Flexible Duct Connector

Standard fabrics in the production range include Polyester, & 100% Cotton Canvas Fabrics meet the requirements of UL214 and are flame retardant fabrics.

Neoprene coated fabrics is classified as Class 1, when tested as per BS 476, Part 7 tests for spread of Flame . Canvas fabric has a special fire retardant coating to meet BS Standard.

UL certified Comply to NFPA 701-2010 (formerly UL 214) Strong Airtight lock seams, Flame retardant coating with non combustible fabric Resistant to weather and most chemicals, fat, grease and oil Not affected by mildew

Standard Box Size- 75ft, 100ft & 150ft

1 3/4" Metal x 3" Neoprene Fabric x 1 3/4" Metal

3" Metal x 3" Neoprene Fabric x 3" Metal



Multi Band & Lock

1 . Clamp Band -9mm x 30 meter

2 . Lock /Clip Self Locking – GI

3 . Stainless Steel Jubilee Lock Sizes 4" to 12"



General Accessories

| Product Image | Product Name | Description Brand | Size | Product Image | Product Name | Description Brand | Size |
|--|--------------------------------|--|------------------|---|-----------------------------------|---------------------------|------------------|
|  | Refrigerant Gas | R-22 | 13.6 Kg Cylinder |  | Canvas Cloth | PAKISTAN | 6 oz & 8 oz |
|  | Refrigerant Gas | R-407 C | 11.3 Kg Cylinder |  | Stuck up PIN | GI | 1 3/8" & 2" BASE |
|  | Refrigerant Gas | R-410 A | 11.3 kg Cylinder |  | Profile Glue | FEVICOL | 500 gms |
|  | Sight Glass | Dry All, Emerson & All other Brand | All Sizes |  | PIR Glue | FEVICOL | 15 liter |
|  | Shut Off Valve | CHINA | All Sizes |  | MS Angle | INDIA | All Sizes |
|  | Filter Dryer | Dry All, Emerson & All other Brand | All Sizes |  | GI Sheet & Coil | JINDAL | All Thickness |
|  | Inline Duct Fan GI | S & P, DOSPEL, AXTON & All other Brand | 4" to 12" |  | Aluminum Plain Sheet | JINDAL HINDALCO | All Thickness |
|  | Inline Duct Fan PVC | S & P, DOSPEL, AXTON & All other Brand | 4" to 12" |  | Brazing Rod | Harris USA | |
|  | Damper Quadrant Regulator Type | INDIA | 6mm to 10mm |  | Thermostat | Honeywell Johnson Control | |
|  | Damper Quadrant Handle | INDIA | 6mm to 10mm |  | Copper Pipe Cutter & Flaring Tool | CHINA | |
|  | GI Round Ring | INDIA | 4" to 12" |  | Brass Flare Nut | INDIA & CHINA | All Sizes |
|  | Splitter Damper & Ball Joint | INDIA | | | | | |

Brands



DUCT COOL



Office : Goole Map / Reetaj General Trading
Google Map / Reetaj General Trading Warehouse

UAE

- Tel:+971 6 535 2433
- Fax:+971 6 535 2435
- P.O.Box: 151131
- Sharjah

KSA

- Tel:+966 11 219 6650
- Fax:+966 11 219 6640
- P.O.Box: 286347
- Riyadh 11323

Email: info@reetaj.ae ■ Email: Sales@reetaj.ae